


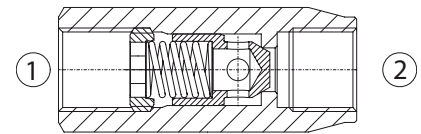

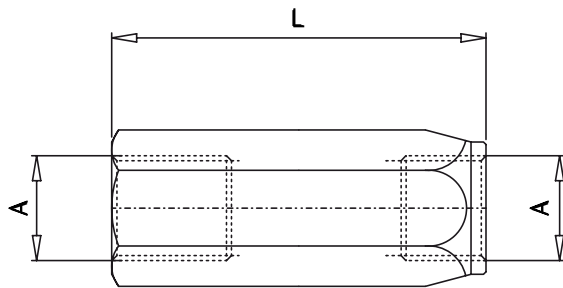
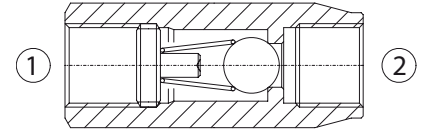




Dati tecnici Technical data	
Viscosità fluido Fluid viscosity	10-500 mm ² /s 45 to 2000 ssu (6 to 420 cSt)
Classe di contaminazione Filtration	ISO code 16/13 SAE class 4 or better
Temperatura fluido Fluid temperature	-20°C +80°C -4°F + 176°F
Temperatura ambiente Ambient temperature	-20°C +50°C -4°F +122°F

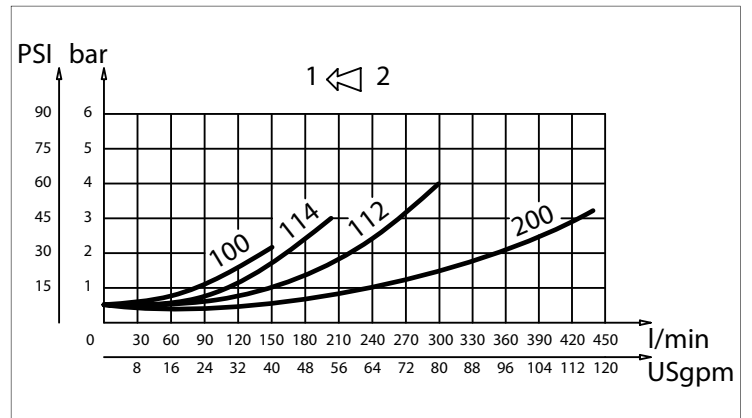

mm
(Inches)

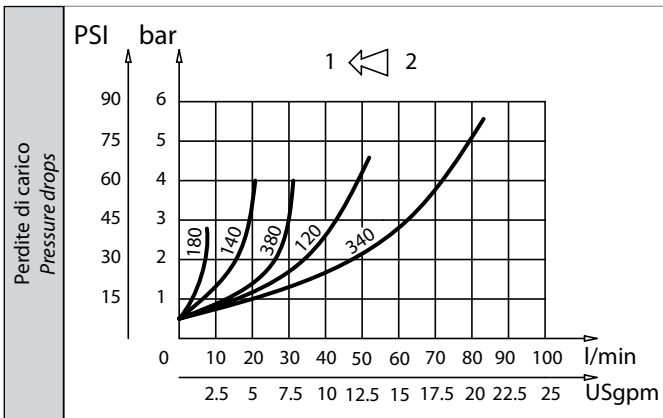

Caratteristiche tecniche Technical performances						
Codice Code	A	Portata Max Max flow l/min-USgpm	Pressione Max Max pressure bar/PSI	L	Ch	Peso approssimativo Approx weight Kg / lb
VUR 180	BSPP 1/8	5 (1.3)	400 (5800)	47 (1.85)	14 (0.55)	0,05 (0,11)
VUR 140	BSPP 1/4	15 (4)	350 (5000)	55 (2.16)	19 (0.75)	0,10 (0,22)
VUR 380	BSPP 3/8	30 (8)		65 (2.56)	24 (0.94)	0,18 (0,40)
VUR 120	BSPP 1/2	50 (13)	320 (4600)	75 (2.95)	27 (1.06)	0,31 (0,70)
VUR 340	BSPP 3/4	90 (23)	300 (4350)	86,5 (3.41)	35 (1.38)	0,45 (1)
VUR 100	BSPP 1	150 (40)	250 (3600)	110 (4.33)	41 (1.61)	0,95 (2,10)
VUR 114	BSPP 1-1/4	200 (50)		123 (4.84)	55 (2.16)	1,49 (3,30)
VUR 112	BSPP 1-1/2	300 (80)	210 (3000)	138 (5.43)	60 (2.36)	2,40 (5,30)
VUR 200	BSPP 2	430 (110)	150 (2100)	160 (6.30)	70 (2.76)	3 (6,60)

Codice ordinazione Ordering code					
VUR - X - Y - K					
X	Dimensione / Size	Y	Tenuta / Sealing		
180	BSPP 1/8	SF	Tenuta a sfera solo per VUR 180/140/380/120 Ball sealing only for VUR 180/140/380/120		
140	BSPP 1/4				
380	BSPP 3/8				
120	BSPP 1/2				
340	BSPP 3/4	SP	Tenuta a cono Poppet sealing		
100	BSPP 1	K	Molla / Spring		
114	BSPP 1-1/4			1	1 bar Standard
112	BSPP 1-1/2			3	3 bar
200	BSPP 2			6	6 bar